

Kraft Back / JR KB

- Duplex Board with Kraft Back Layer, Coat Weight: 16 g/m²
- Basis Weights - 150 to 450 GSM


BOARD CONSTRUCTION



Product Top View



Product Bottom View

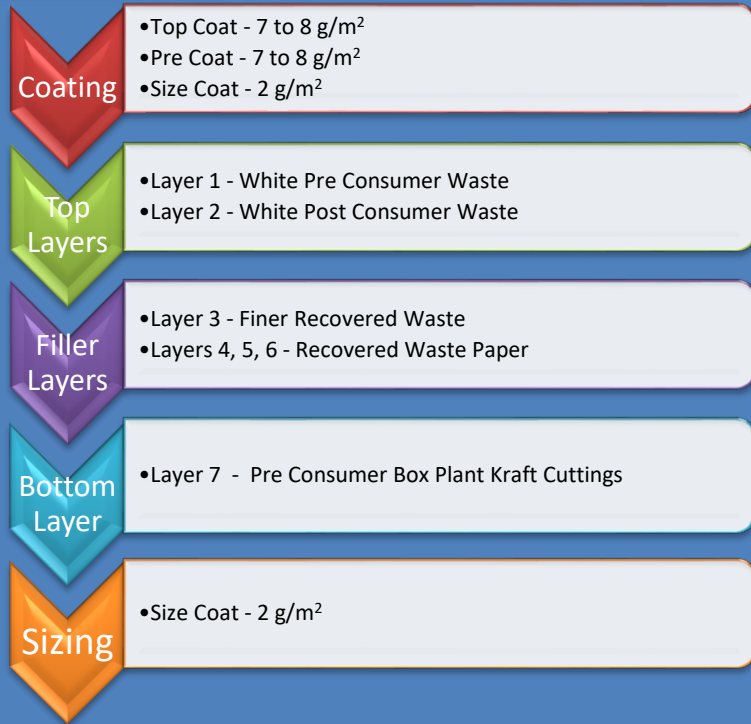

FEATURES:

White Lined Heavy Weight Coated Packaging Board with Kraft layer at the back for high strength and High Stiffness applications. Superior Performance for Contemporary Printing, Packaging, and other applications.

USES:

For Printing and Packaging applications in the Shirt Inserts and Back Supports in Garments & Textiles, Substitute for E-Flute cartons in FMCG sector, Automobile Spare Parts, Appliances Consumer Durables, Point of Sale Display Cartons, Top Liner in Corrugated Boxes, Folding Box Boards – Mono Cartons etc.



Kraft Back / JR KB

(TECHNICAL SPECIFICATIONS)

- Duplex Board with Kraft Back Layer, Coat Weight: 16 g/m²
- Basis Weights - 150 to 450 GSM

Substance (GSM)	Caliper (microns)	Bulk (cc/gms)	Taber Stiffness (gm-cm)	
			MD	CD
200	240	1.20	24	10
230	281	1.22	36	15
250	308	1.23	55	22
285	353	1.24	86	34
300	375	1.25	105	42
320	403	1.26	118	47
350	441	1.26	152	61
380	483	1.27	185	74
400	512	1.28	230	92
450	581	1.29	300	120
500	650	1.30	360	144
550	720	1.31	390	156
Tolerance: ±3%	Tolerance: ±5%	Tolerance: ±5%	Tolerance: ±10%	

Parameter	Unit	Value
Ply bond	J/m ²	130 min
Smoothness (Bendsten)	MI/min	50-80
Brightness (TAPPI Standard)	%	78 (±1)
Cobb Top (60)	GSM	30-40
Gloss at 75 deg	%	36 (± 5)
Moisture	%	6.0-8.0
IGT	Mts/sec	Min 0.7
		Tolerance: ±3%

Please note:

1. The tolerances are based upon 95% confidence limit and on laboratory results of random samples from mill.
2. The specifications are subject to change without any prior notice.
3. Brightness value as per ISO Standard shall be 3% higher than that in TAPPI Standard.
4. Paper board Machine Deckle: 315 cms to 325 cms.
5. Cobb is measured such that the entire testing is completed in 60 seconds and whatman filter is used for testing.

Venkraft Paper Mills Pvt Ltd., Unit – 2

Duplex Unit – Factory Address: 12th K.M., NH-7, Gopasandaram village, Kamandoddi (p.o.), Shoolagiri Union, Hosur-635109, Tamil Nadu, India.

Domestic Marketing Contacts: Email: marketing2@venkraft.com, Marketing Head (+ 91 9629606060), Tamil Nadu Coordinator (+91 8220005701, +91 8220788644, +91 7867008821).
Karnataka Coordinator (+91 7867008841, +91 8220005706, +91 7867013684, +91 7867013685).
Kerala Coordinator (+ 91 8220005706).
AP Coordinator (+91 9943332474).
Dispatch department (+91 7867008825).

Export Marketing Contacts: Email: exports@venkraft.com, Export Coordinator (+ 91 8220005701).

www.venkraft.com
